

FIGURE 1

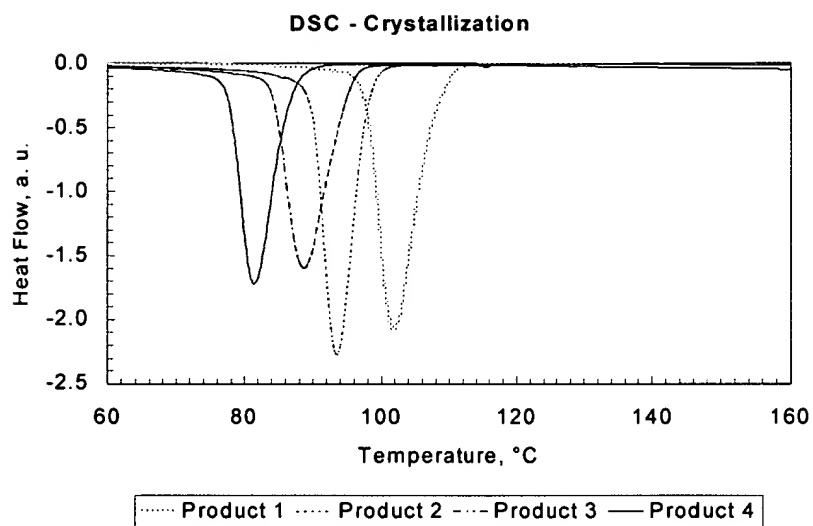


FIGURE 2

FIGURE 3A

Heat Seal Profile (Max) mRCP and znRCP - cast films

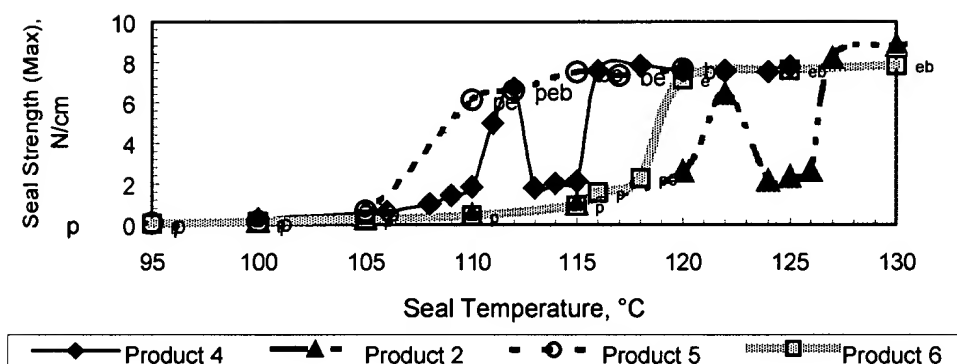


FIGURE 3B

Metallocene and Z-N Propylene Copolymers

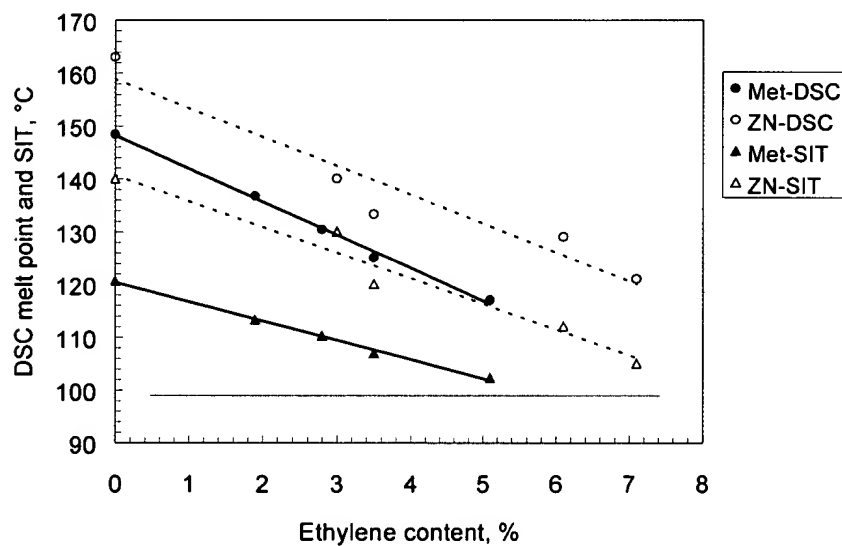


FIGURE 4

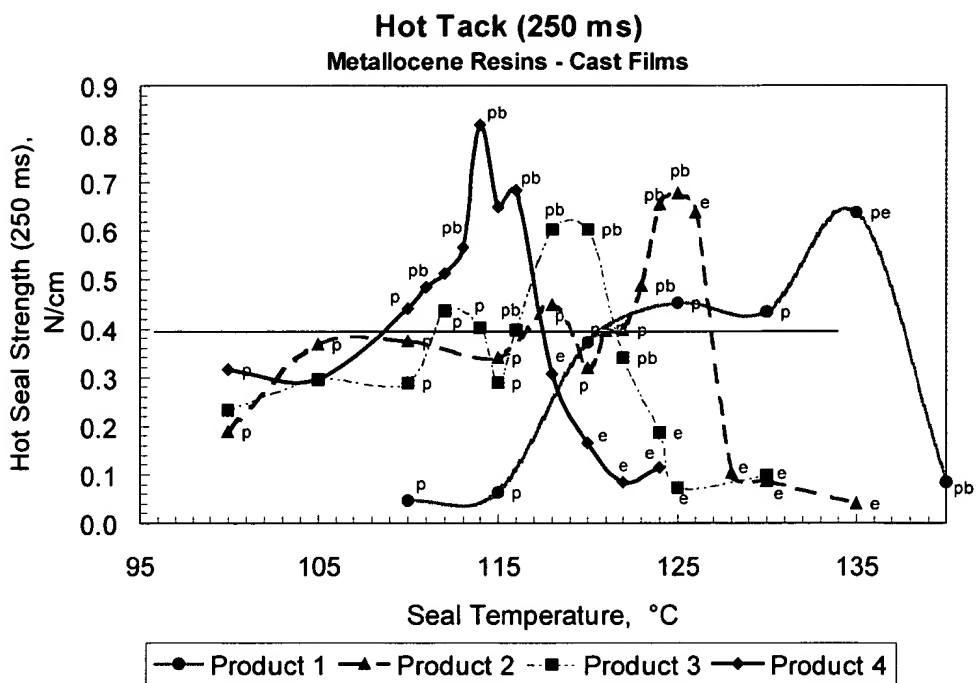


FIGURE 5A

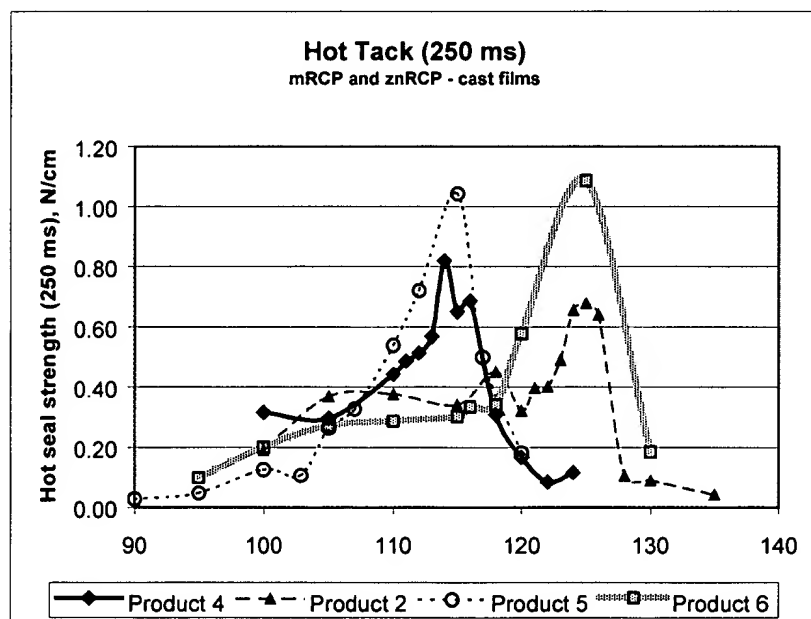


FIGURE 5B

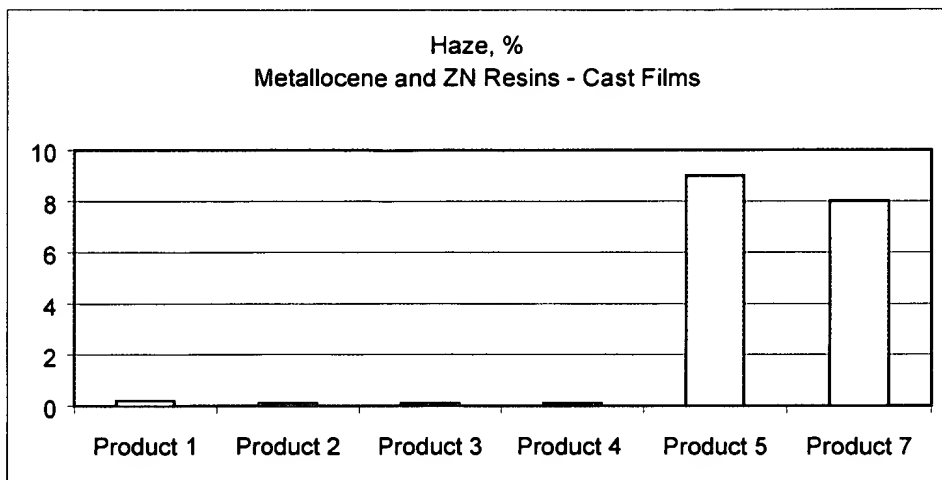


FIGURE 6

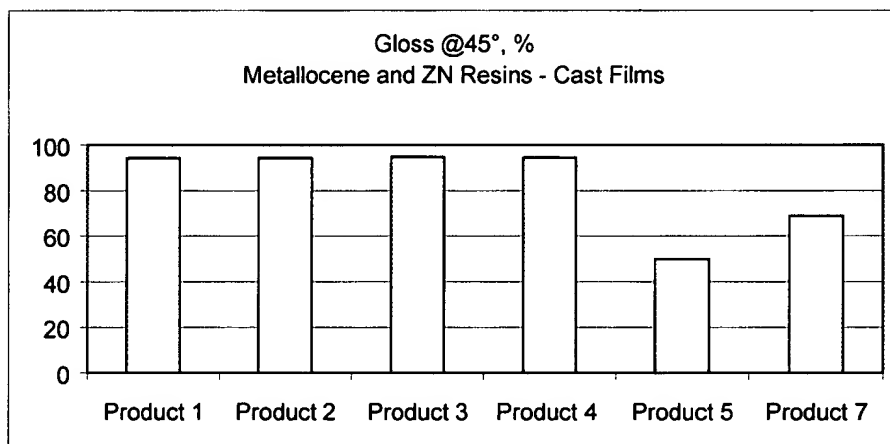


FIGURE 7

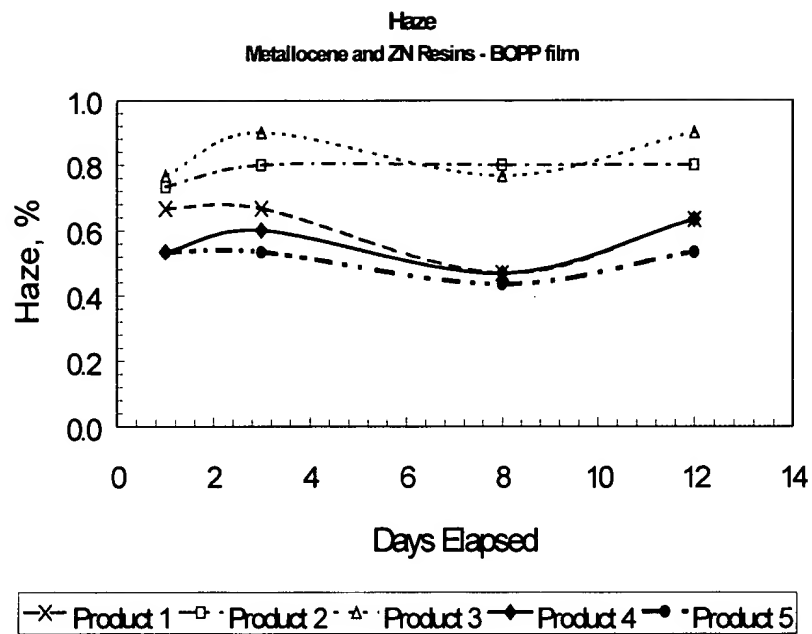


FIGURE 8

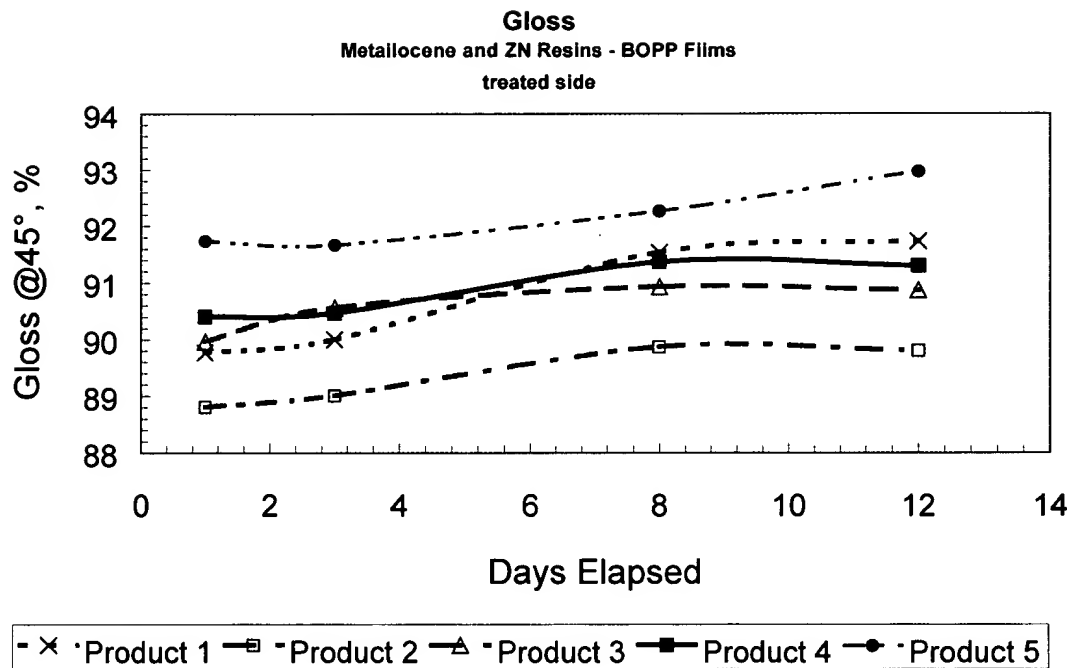


FIGURE 9

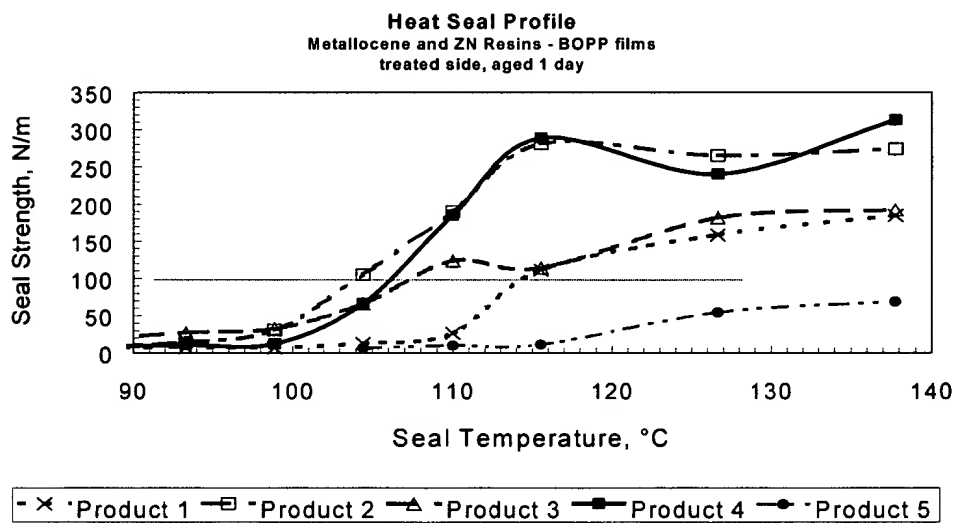


FIGURE 10

Heat Seal Profile

Metallocene and ZN Resins - BOPP films
treated side, aged >12 days

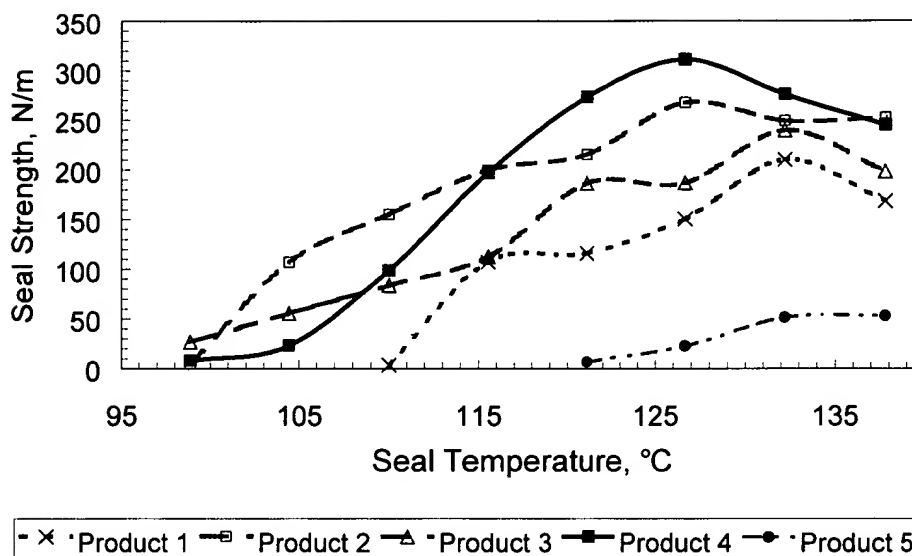


FIGURE 11

Hot Tack Sealing Profile

Metallocene and ZN Resins - BOPP film
treated side, aged 1 day

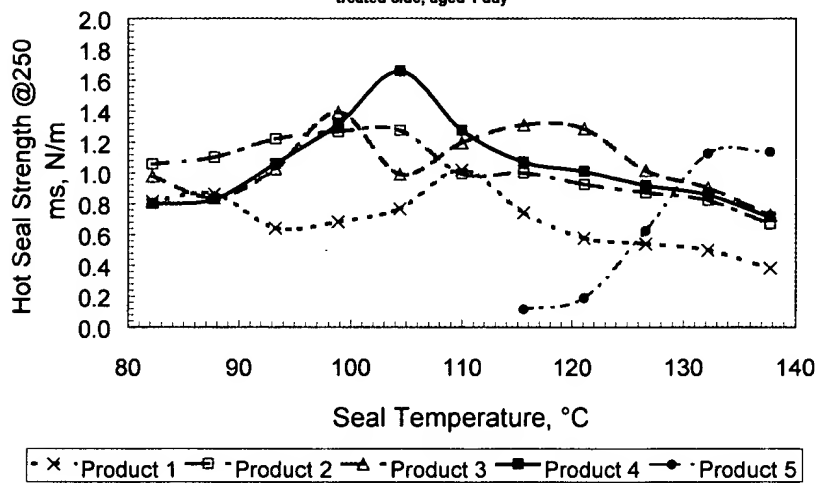


FIGURE 12

Hot Tack Sealing Profile
Metalocene and ZN Resins - BOPP film
treated side, aged >12 days

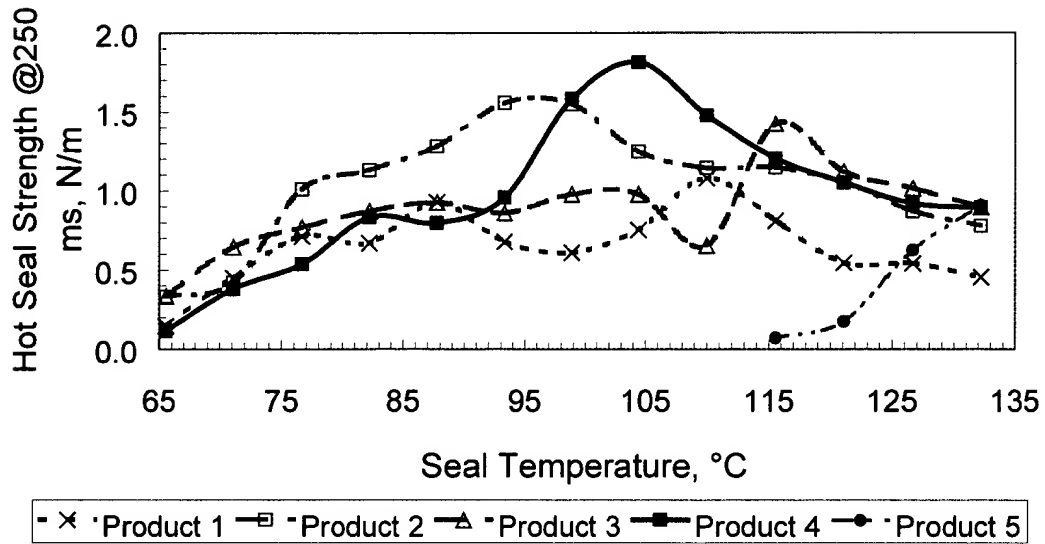


FIGURE 13

Seal Strength vs. Seal Temperature

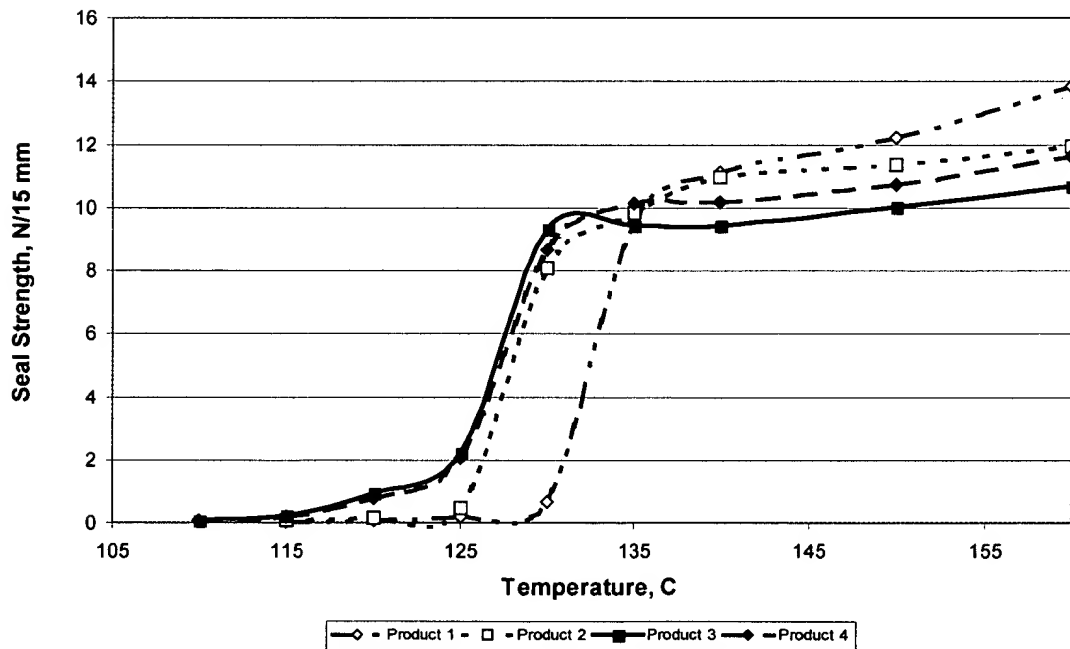


FIGURE 14